


**Features:**

- Broad band from 9 kHz to 3GHz.
- Low noise, and high gain
- Low VSWR, unconditional stable
- Small size, low cost
- SMA female connector I/O
- Single +12V DC power supply
- Operating temperature -40~+85°C, storage temperature -55~+125°C

**Electrical Specifications**

Parameters	Minimum	Typical	Maximum
Frequency Range	9 kHz		3000MHz
Noise Figure (from 50MHz)		2.5 dB	3.0 dB
Nominal SS Gain @25°C	50 dB	52dB	55 dB
P-1dB Compression Point	+15dBm	+16 dBm	
Gain flatness		+/-1.5 dB	+/-2.0 dB
Gain Variation		+/-1.5 dB	
Input VSWR		1.6:1	2.0:1
Output VSWR		1.8:1	2.5:1
Reverse Isolation	60dB	65dB	
Spurious			-60 dBc
Operating Temperature	-40°C		+75°C
Survival Temperature	-55°C		+125°C
DC Voltage		+12 V	
DC Supply Current	140 mA	160 mA	190 mA
In/Out connectors	SMA female		
Size	1.7"x0.95"x0.375		

Mechanical Structure:

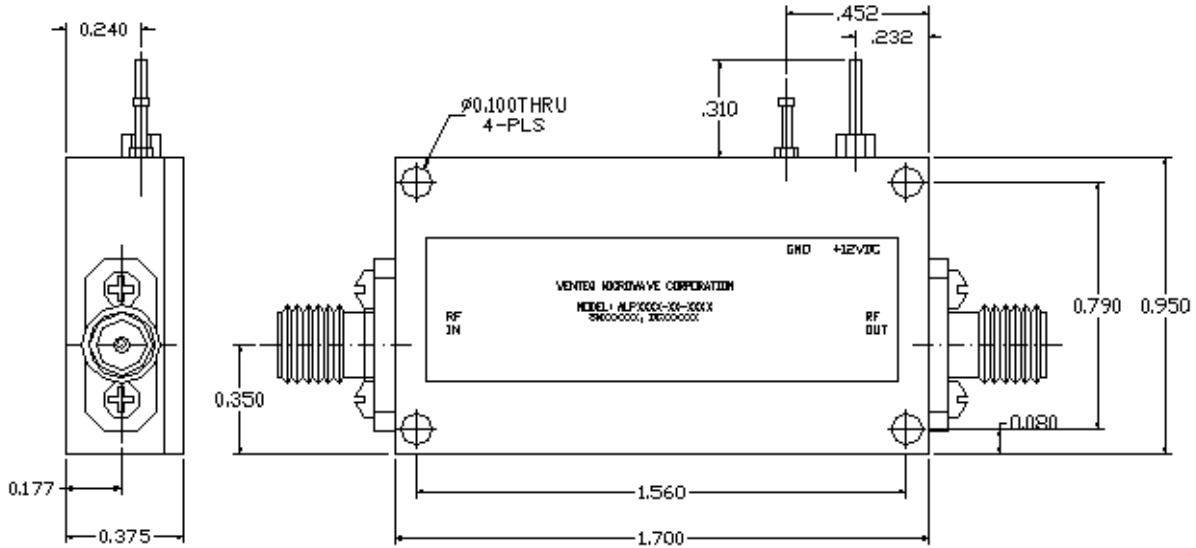

Note: All units in inches.