


Features:

- Broad band operation from 2.0 to 4.0 GHz
- Low VSWR, unconditional stable
- Small size, low cost
- SMA female connector I/O
- Single DC power supply, internal voltage regulator allowing operating voltage from +8V to +15V range
- Operating temperature -20~+60°C, storage temperature -45~+85°C

Electrical Specifications

Parameters	Specifications		
	Minimum	Typical	Maximum
Frequency Range	2000 MHz		4000MHz
Noise Figure @25°C		0.8 dB	1.0 dB
Nominal SS Gain @25°C	30.0 dB	33.0 dB	36.0 dB
P-1dB Compression Point	+10.0 dBm	+13.0 dBm	
Output Saturated Power	+12.0	+15.0	
Output IP3	+25.0	+27.0	
Gain flatness		+/-1.0 dB	+/-1.25 dB
Gain Variation over temperature		+/-1.5 dB	
Input VSWR		1.5:1	2.0:1
Output VSWR		1.6:1	2.0:1
Reverse Isolation	55dB	60dB	
Spurious			-60 dBc
Operating Temperature	-40°C		+75°C
Survival Temperature	-55°C		+125°C
DC Voltage	+8.0V		+15 V
DC Supply Current	80 mA	100 mA	150 mA
RF In/Out connectors	SMA female		
DC Input Connector	Feed-thru PIN		
Size	1.5"x0.85"x0.375		

Mechanical Structure:

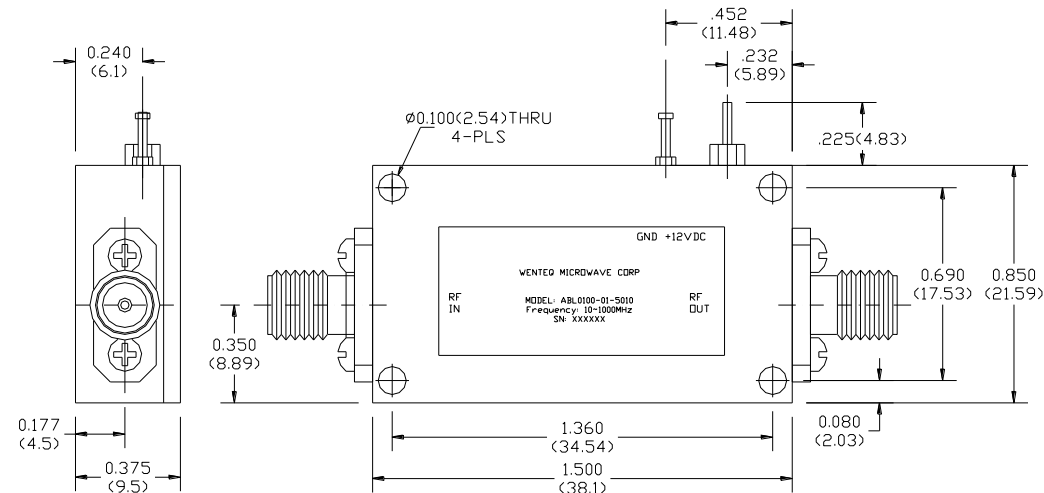

Note: All units in inches (mm).

Absolute Maximum Ratings

DC Voltage	+18V
RF Input Power	+10dBm
Storage Temperature	-55~+125°C
Operating Temperature	-40~+75°C



Electrostatic sensitive device, please observe precautions for handling this amplifier.